

HEAD OFFICE



1 Genting Link

#02-04, Perfect One

Singapore 349518



(+65) 6748 2277



(+65) 6744 0033




sales@hakko.com.sg



@hakkoproducts

T13 Series Soldering Tips

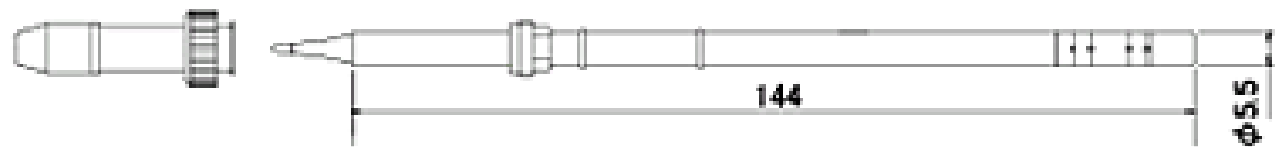


T13 series is available if long nipple is attached to Soldering Iron HAKKO 912.

Compatible with lead-free solder.


Shape BCM/CM

This type differs from Shape BC by the addition of a hollow to its cut face, providing high solder retention capability.

It is used for drag soldering and correction of bridging.

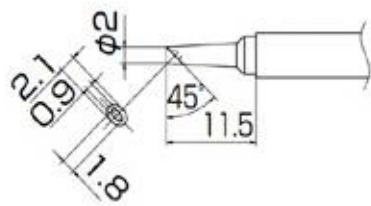


T13-BCM2 Shape-2BC Bevel with indent
B2706 Nozzle assembly A

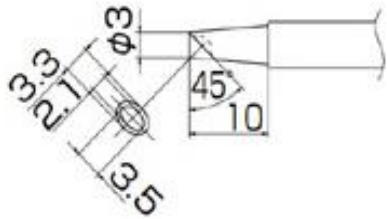


T13-BCM3 Shape-3BC Bevel with indent
B2900 Nozzle assembly G

Shape BC/C


This type has a shape like a cone or column cut at a slant, which allows users to select the cut surface size depending on the workpiece. It is used for drag soldering and pre-tinning of lead wires.

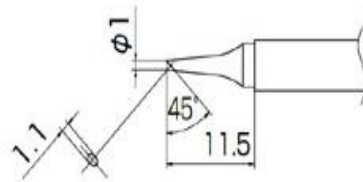


T13-BC1 Shape-1BC
B2899 Nozzle assembly F

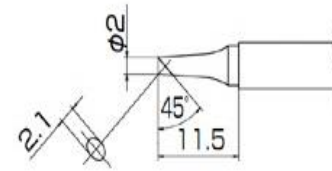


T13-BC2 Shape-2BC
B2706 Nozzle assembly A

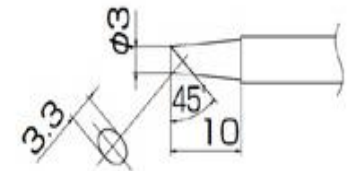


T13-BC3 Shape-3BC
B2900 Nozzle assembly G

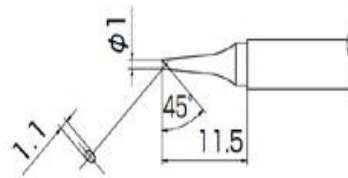

T13-BCF1 Shape-1BC
Tinned cut surface only
B2899 Nozzle assembly

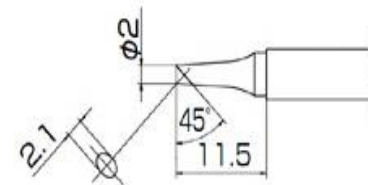


T13-BCF2 Shape-2BC
Tinned cut surface only
B2706 Nozzle assembly A




T13-BCF3 Shape-3BC
Tinned cut surface only
B2900 Nozzle assembly G

Shape B


This type differs from Shape B and I by bending the tip end and is capable of soldering by applying the tip in 2 ways: face and point. It is used for drag soldering and correction of bridging.



T13-B2 Shape-0.5B
B2708 Nozzle assembly C




T13-BL Shape-BL
B2898 Nozzle assembly E

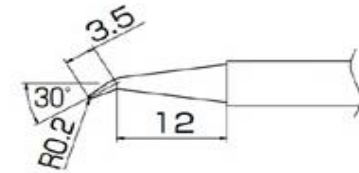


T13-J02 Shape-0.2J
B2707 Nozzle assembly B

Shape D


This type has a shape like a flat-blade screwdriver and is capable of soldering by applying the tip in 2 ways: line and face. The width (size of tip) suitable for the workpiece can be selected, and it can be used for any soldering work

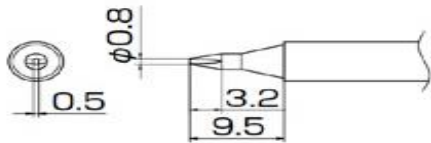

T13-D08 Shape-0.8D
B2709 Nozzle assembly D

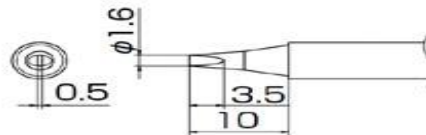


T13-D16 Shape-1.6D
B2708 Nozzle assembly C

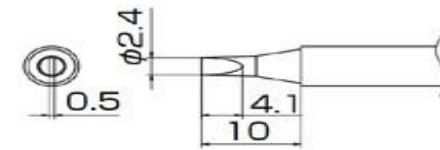


T13-D24 Shape-2.4D
B2708 Nozzle assembly C

Shape K


This type has a shape like a knife and is capable of soldering by applying the tip in 3 ways: line, face, point. It is used for soldering at narrow pitches, correction of bridging and drag soldering

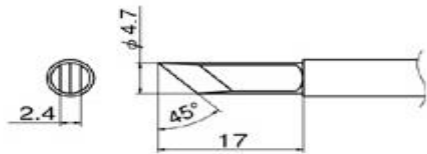

T13-KF Shape-KF
B2923 Nozzle assembly J

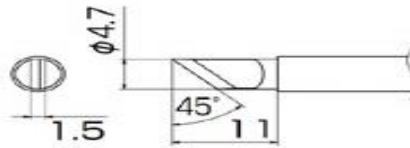

T13-KR Shape-KR
B2902 Nozzle assembly I

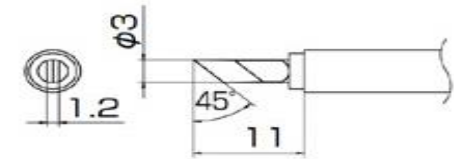

T13-KU Shape-KU
B2901 Nozzle assembly H